

DG-A2/A4



Industrial DIN Rail Protocol Gateway for Smart Grid

- Special designing based on ARM Cortex-A8 architecture
- High performance yet ultra low power consumption
- Easy IEC 61850 SCL(CID/ICD) import and configuration process
- Configurable MMS (IEC 61850-8-1) server & client application
- Support GOOSE publish and subscribe
- Built-in SoftPLC calculating task
- Configurable hardware watchdog
- Full functional NTP for time synchronization
- Dual mode of RS232/RS485 isolated serial ports
- Support GPRS/3G wireless communication
- Remote diagnosis or maintenance by network
- Compliant to IEC 61850-3, IEEE 1613 standards

➤ Overview

As the compact protocol gateway for system integrated application, DG-A2/A4 is designed in conformity with the new IEC 61850 standards. It can be anywhere deployed to be a smart unit to transfer data by its RS232/RS485 serial ports and Ethernet ports. By importing any prespecified IEC 61850 SCL(.icd/.cid) template file and after mapping the data to internal VMD model with the configuration tool - ICE, this unit can be viewed just as the standard IEC 61850 IED from the master station.

With powerful data communication and process function, high reliability, low power consumption, flexible and easy installation advantages, DG-A is the ideal intelligent device choice for all kinds of system integrated applications.

➤ Features & Benefits

Hardware Parameters

Performance: ARMv7 800MHz Core
 RAM: 512M DDR2-333
 Build-in storage: 512M Nand Flash
 Extra storage: 8G/64G Micro SD(Optional)
 Ethernet: 10/100Base-T
 Serial Ports: RS232/RS485(Isolated)
 Wireless Port: 3G GRPS



Firmware

DNP 3.0 Level-2 over serial port or LAN
 Modbus(RTU/ASCII)/Modbus over serial port and LAN
 IEC 60870-5-101/103/104 slave/master
 IEC 61850 MMS/GOOSE
 SoftPLC calculator
 Customer specified

Technical Benefits

Easy framework configurable by all-in one integration tools
 Later data binding & mapping technology without needing change SCL modeling file
 Advanced data internal processing functionality

➤ Typical Application

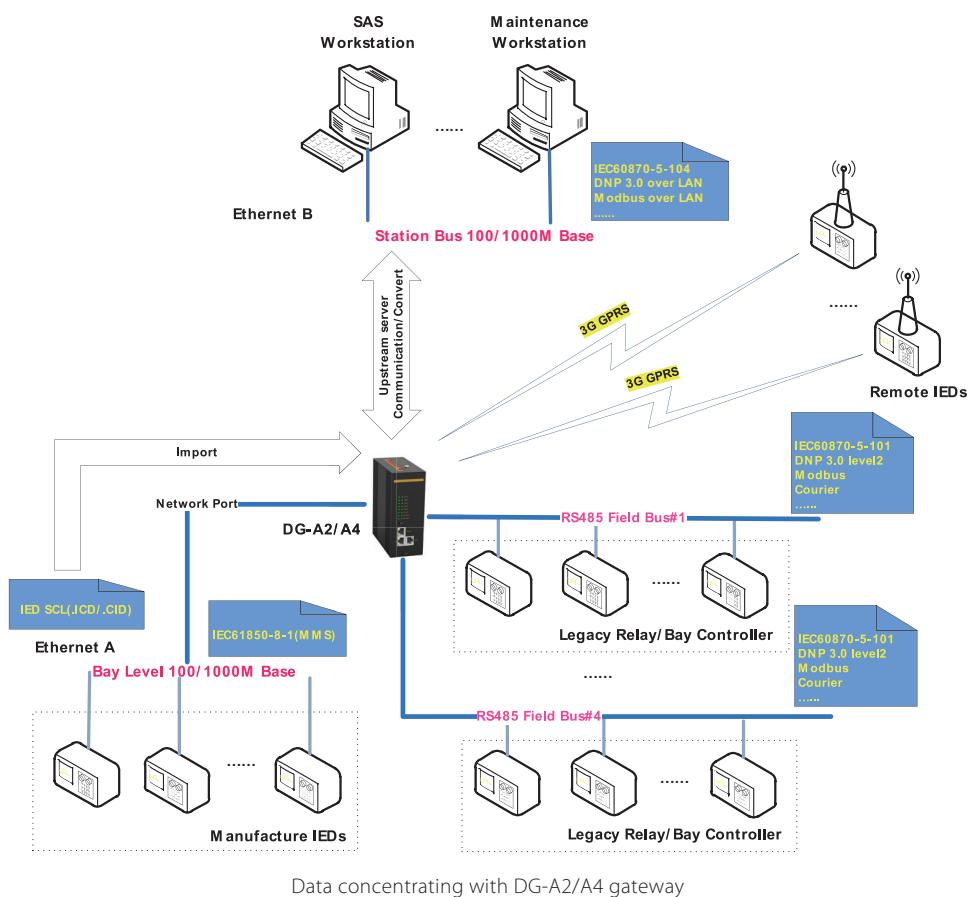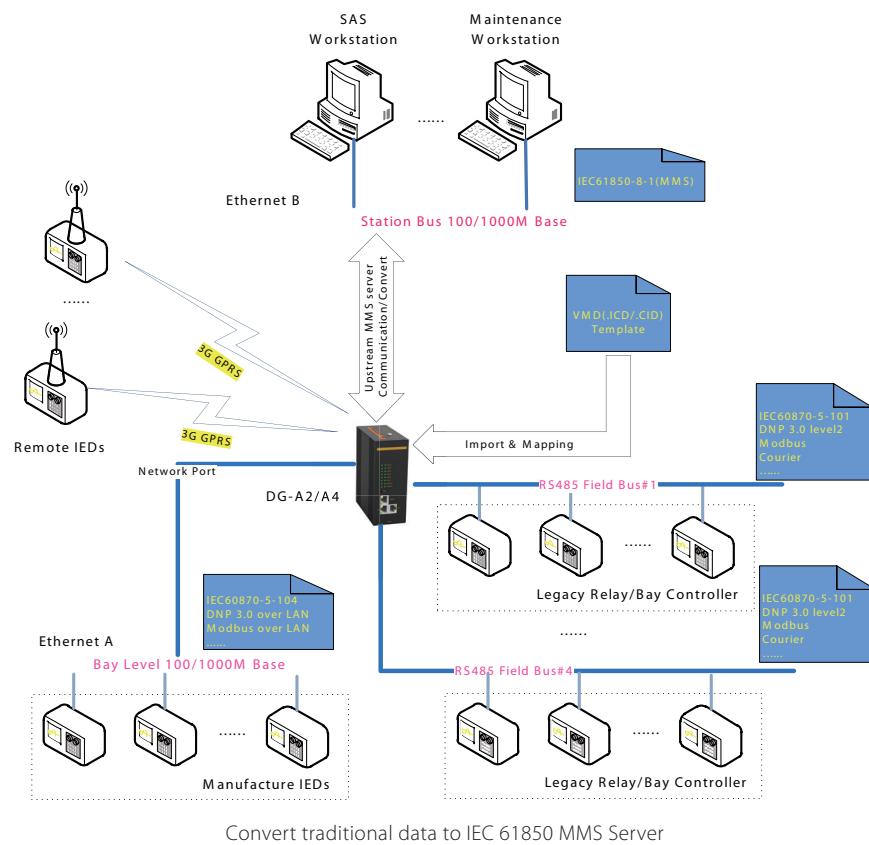

➤ Technical Parameters

Item	DG-A2	DG-A4
Console port	RS232, RJ45	RS232, RJ45
Serial ports	2 x RS232/RS485 (Isolated)	4 x RS232/RS485 (Isolated)
Ethernet	1 x 10/100M RJ45	2 x 10/100M RJ45
GPRS Module	1 x 3G Optional	1 x 3G Optional
Build-in storage	512M Nand Flash	512M Nand Flash
Extra storage	N/A	8G/64G Micro SD
Hardware Watchdog	Configurable	Configurable
Time Synchronization	NTP	NTP
Power Supply	12-24VDC	12-24VDC/85-264VAC
Power Consumption	<5W	<5W
Weight	0.5kg	0.5kg
Dimension (WxHxD)	48x138x86 mm	54x139x118 mm
Mounting	DIN Rail	DIN Rail
Operating Temperature	-40 to 85°C	-40 to 85°C

➤ Electrical Parameter

Input: 12~24V DC or 85~264V AC

Average power consumption: 5W

Relative humidity : 5%~ 95% (no condensation)

Electrostatic discharge immunity test: GB/T 17626.2-1998 IEC 61000-4-2-1995 class 4

Transient immunity: GB/T 17626.4-1998 IEC 61000-4-4-1995 class 4

Surge immunity: GB/T 17626.5-1998 IEC 61000-4-5-1995 class 4

Power frequency magnetic fields immunity: GB/T 17626.8-1998 IEC 61000-4-8-1995 class 5

Ring waves immunity: GB/T 17626.12-1998 IEC 61000-4-12-1995 class 4

Pulse magnetic field immunity: GB/T17626.9-1998 IEC 61000-4-9-1995 class 5

Damped oscillatory magnetic field immunity: GB/T17626.10-1998 IEC 61000-4-10-1995 class 4

Voltage dips and short interruptions and voltage variations immunity: GB/T 15153.1-1998 IEC 61000-4-11 2004 Δ U-100%, Δ t = 0.5s



Insulation resistance: >5MΩ

Insulating strength: no breakdown when applying 500V and 1500V to the communication ports and power supply ports respectively

Dry heat test: GB/T2423.2-2001 IEC 60068-2-2 75°C, 24 hours Cold test: GB/T2423.1-2001 IEC 60068-2-1 -25°C, 24 hours

Damp heat: GB/T2423.3-1993 IEC 60068-2-3 +40°C ± 2°C, 93% ± 3%, insulation, resistance: >1MΩ

 Ordering Information

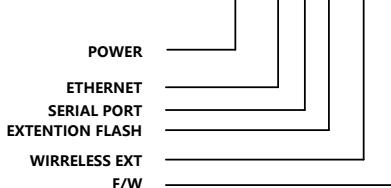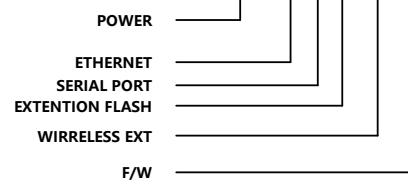DGW-A2X-P-100DEG

DGW-A4X-P-10CDEG

EQUIPMENT

TYPE	A2X	DG-A2(DIN Rail)
POWER	5	12~24VDC
ETHERNET	1	1 x 10/100M BASE-T
SERIAL PORT	0	2 x RS232/RS485 SERIAL PORTS
EXTENTION FLASH STORAGE	0	N/A
WIRELESS EXT	0	N/A
1	GPRS/3G	
F/W	00	DEFAULT(IEC 101/104/DNP 3.0/Modbus S/M)
A4	DG-A4(MMS Sever)	
A5	DG-A5(MMS Client)	
A6	DG-A6(MMS Client/Sever)	
C0	DG-C0(COMMON PROTOCOL)	
C4	DG-C4(MMS Sever)	
C5	DG-C5(MMS Client)	
C6	DG-C6(MMS Client/Sever)	
P0	DG-P0(PRIVATE PROTOCOL)	
P4	DG-P4(MMS Sever)	
P5	DG-P5(MMS Client)	
P6	DG-P6(MMS Client/Sever)	

EQUIPMENT

TYPE	A4X	DG-A4(DIN Rail)
POWER	1	85~264V AC(50/60Hz)
5	12~24V DC	
ETHERNET	1	2 x 10/100M BASE-T
SERIAL PORT	0	4 x RS232/RS485 SERIAL PORTS
EXTENTION FLASH STORAGE	0	N/A
1	8G	
3	64G	
WIRELESS EXT	0	N/A
1	GPRS/3G	
F/W	00	DEFAULT(IEC 101/104/DNP 3.0/Modbus S/M)
A4	DG-A4(MMS Sever)	
A5	DG-A5(MMS Client)	
A6	DG-A6(MMS Client/Sever)	
C0	DG-C0(COMMON PROTOCOL)	
C4	DG-C4(MMS Sever)	
C5	DG-C5(MMS Client)	
C6	DG-C6(MMS Client/Sever)	
P0	DG-P0(PRIVATE PROTOCOL)	
P4	DG-P4(MMS Sever)	
P5	DG-P5(MMS Client)	
P6	DG-P6(MMS Client/Sever)	